

# The automatic Single Point Lubricator

Lubricant capacity 120 ml

# BEKA® ONE 120

## Refillable

- For grease and oil
- Refilling at any time
- Grease nipple for filling without dismantling

Made in  
GERMANY 

## Eco-friendly

- Long use
- No throw-away cartridges

## Economic

- Up to 6 x 120 ml lubricant
- Filling with grease gun

## Efficient

- Electromechanical drive
- Precise metering
- Maximum pressure 10 bar
- Indication capacity by LED

**...higher performance  
at lower costs!**



**6x120  
= 720 ml  
LUBRICANT**

BAIER + KÖPPEL GmbH + Co. KG  
Beethovenstraße 14  
fon +49 9241 729-0  
beka@beka-lube.de

91257 Pegnitz/Bayern  
fax +49 9241 729-50  
www.beka-lube.de



# The automatic Single Point Lubricator

Lubricant capacity 120 ml

# BEKA ONE 120


The ideal solution for reliable supply of standalone lubrication points!

Made in GERMANY 


## BEKA ONE

-  ...has an **electromechanic drive** and a very high **dosing accuracy**. Controlled and monitored by **microcontroller**.
-  ...can be used within a **wide temperature range**: From **-20 °C** up to **+60 °C** (with suitable lubricant).
-  ...cares for **reliable lubricant supply**: Up to **24 months** per filling!
-  ...can be filled up to **6 times**. This corresponds to a total lubricant capacity of **720 ml**.
-  ...can be **filled easily** and **quickly** with a **grease gun**. **Low costs** by the use of grease from standard cartridges.
-  ...offers **low service costs**: Filling **without dismantling** or **change of cartridges**.
-  ...has a **higher output pressure** than conventional devices and can also be used for applications with **higher counterpressure**.
-  ...**saves the lubricant**: No permanent pressure on the lubricant. Therefore **suitable** for **lubricants with separation tendency**.
-  ...is available **with or without filling**. **Special lubricants on demand**.

RUNTIME up to  
**24**  
MONTHS



MAXIMUM  
**10**  
BAR  
PRESSURE

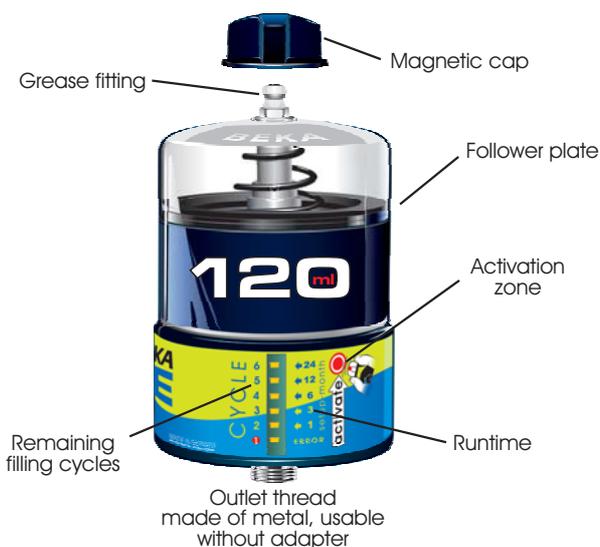

Indirect connection with hose line possible!

Lubricant volume:	120 ml (refillable)
Discharges:	Up to 6 = 720 ml
Lubricant:	Oil or grease up to NLGI cl. 2
Temperature range:	-20 °C to +60 °C (with suitable lubricant)
Operating pressure:	Up to 10 bar
Diameter / height:	70 mm / 127 mm
Protection class:	IP 65 (with membran sticker)
Power supply:	LI batteries
Runtime per filling:	1 / 3 / 6 / 12 / 24 months
Lifetime of batteries:	Up to 48 months
Fixing thread:	External thread R1/4
Order number:	10112271 (without filling)

AT2078000718-EN-1090200697



The lubricator for every kind of application

